

Bold Displays, Bigger Impressions

Capture attention with the CN01 Series
where commercial display meets brilliance



Seamless Visual Communication with CN Series

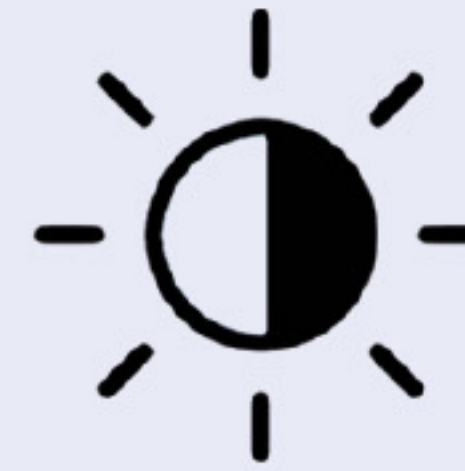
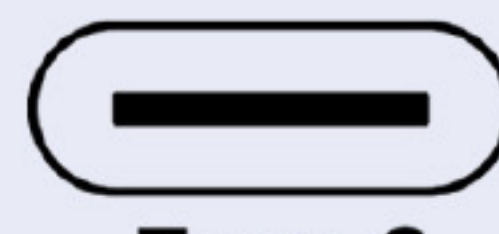
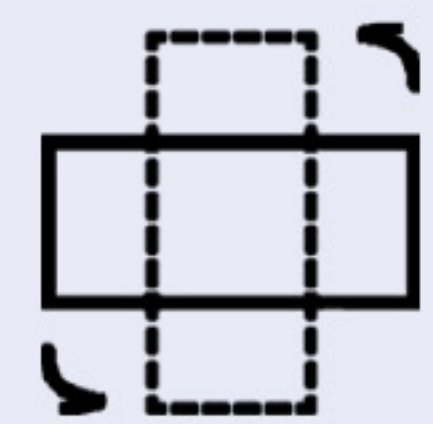
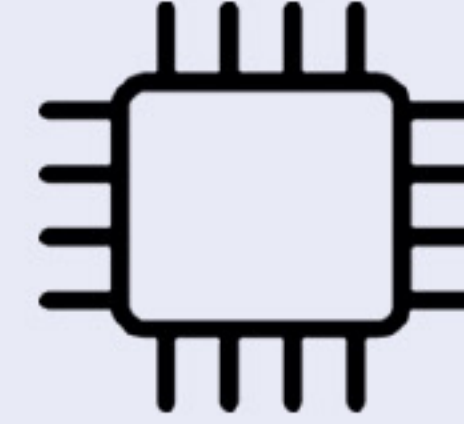
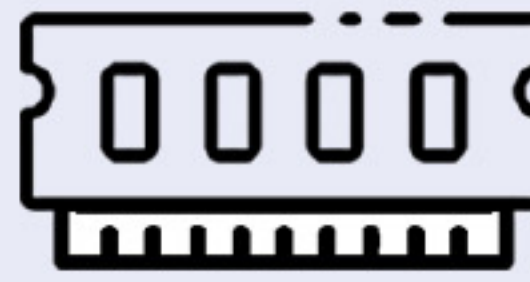
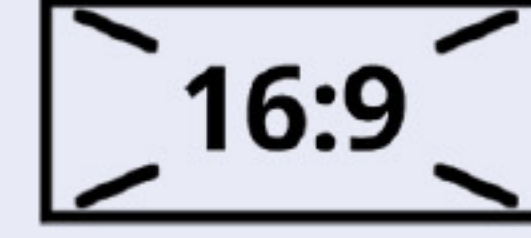


Available in: 43", 55", 65", 75" inch

CN4301-1N | CN5501-1N | CN6501-1N | CN7501-1N

4K Signage Displays

The CN Series offers 4K UHD brilliance with portrait and landscape display flexibility. Equipped with a built-in signage player, 24/7 performance, and support for wireless casting, it's perfect for schools, offices, and public spaces. Sizes range from 43" to 75", with HDMI connectivity included.

 4K Ultra HD	 520 Nits Brightness	 Communication Uninterrupted	 One Cable Solution	 Flexible Installation	 Backlight Life
 Quad-core CPU	 RAM-4GB ROM-32GB	 Embedded OS Android 14	 Wireless Casting	 16:9 Aspect Ratio	 HDMI® 2.1 x2 (HDCP 2.2)



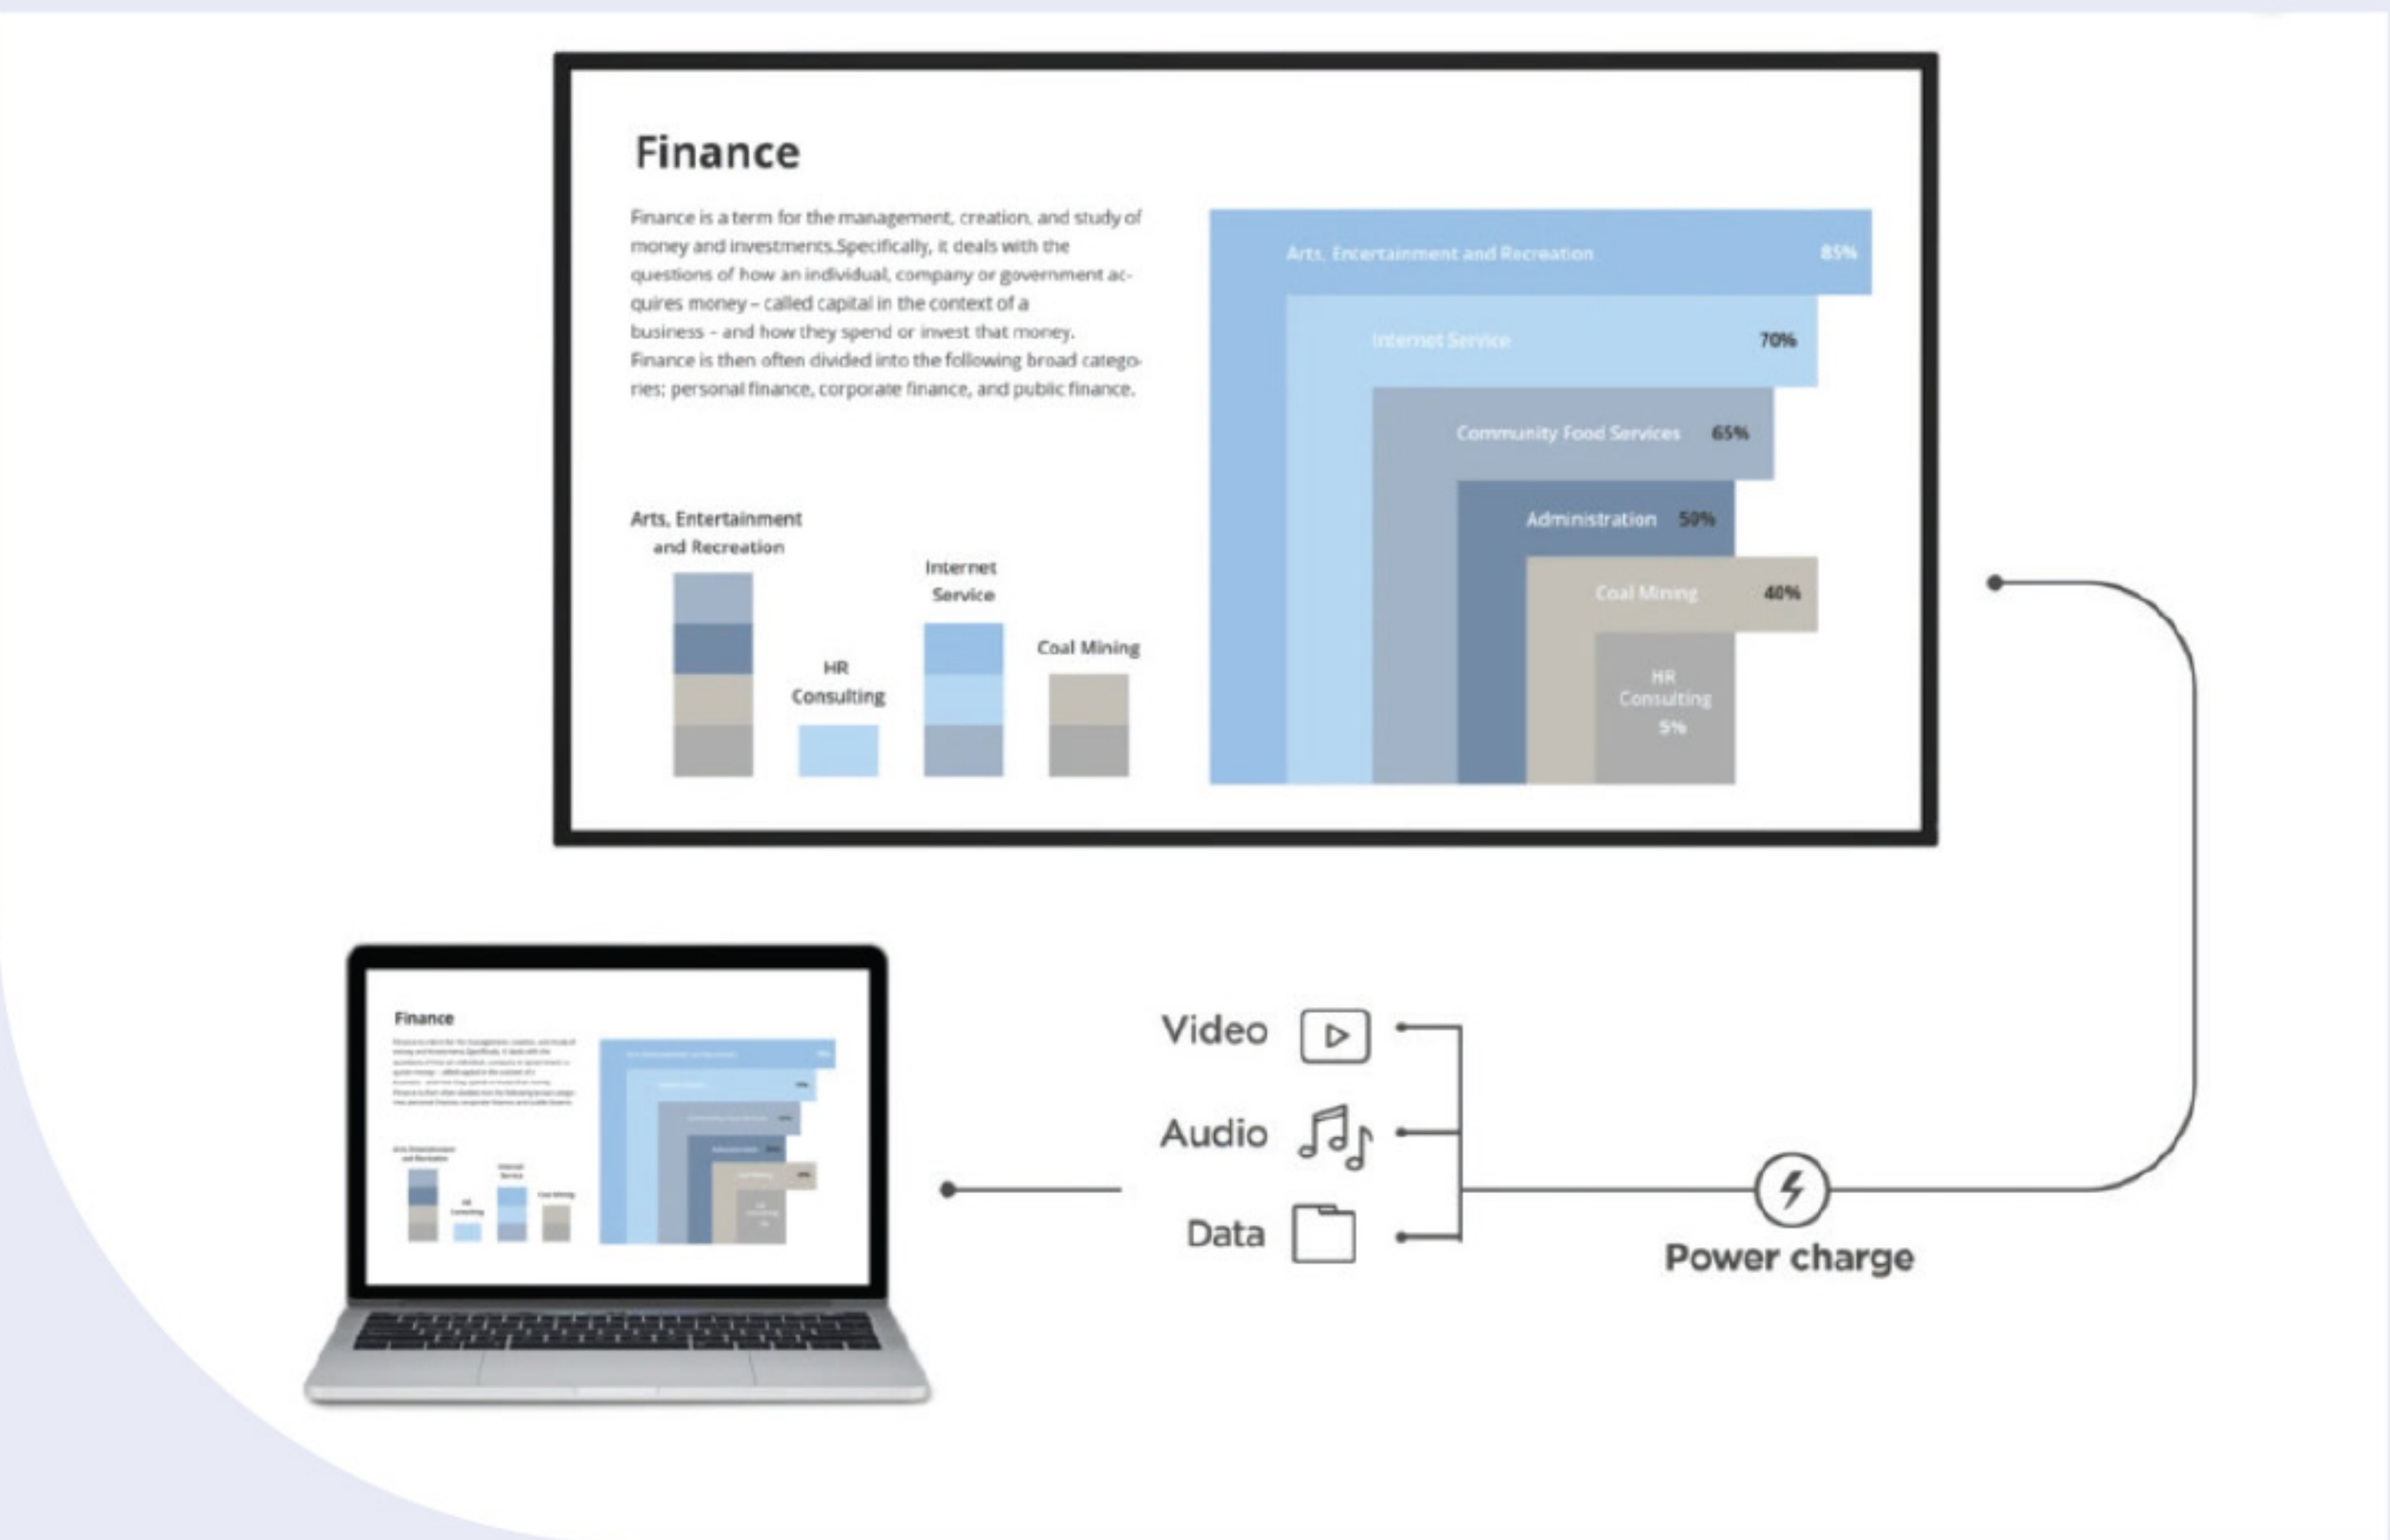


Built to Perform, Day and Night

Designed for 24/7 operation, the CN Series delivers high brightness and clear visibility in any lighting—ideal for continuous, mission-critical messaging.

Portrait or Landscape Your Choice

Easily switch between landscape and portrait modes for adaptable digital signage across any commercial setting.



One Cable, Total Convenience

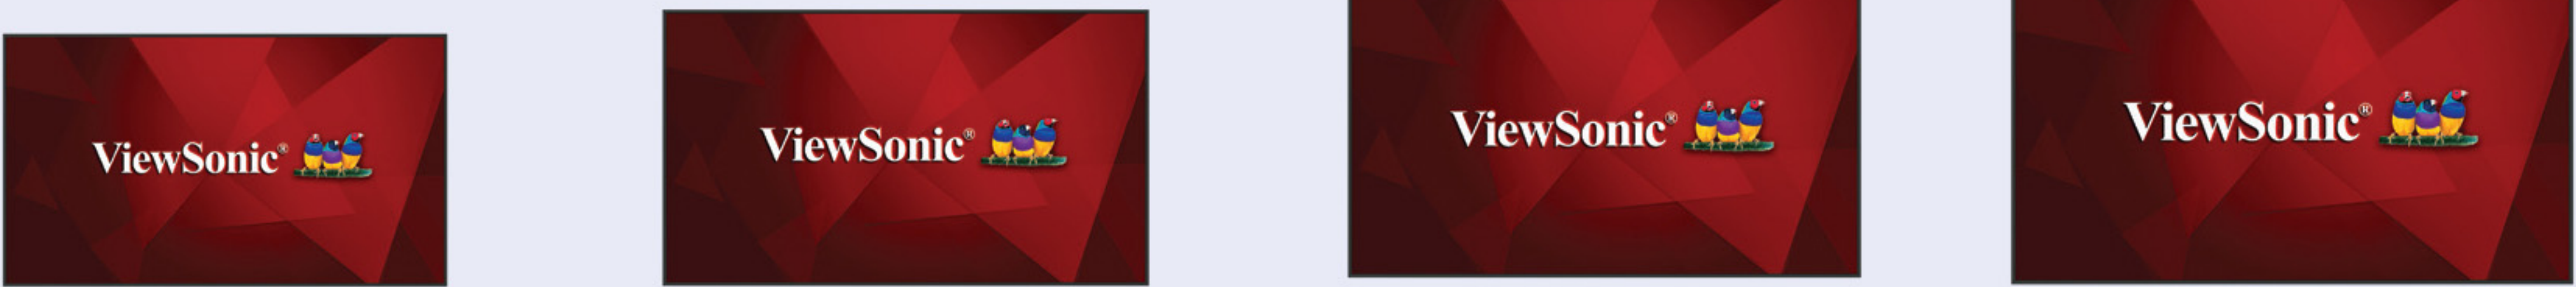
Enjoy high-speed data, video, and power delivery with a single USB-C cable—enhancing efficiency and minimizing cable clutter.

Effortless Wireless Casting

With built-in support for AirPlay, Miracast, and Chromecast, the CN Series allows easy wireless content sharing across devices.



Specifications



Display	Model	CN4301-1N	CN5501-1N	CN6501-1N	CN7501-1N
	Panel Size	43"	55"	65"	75"
	Type/Tech	TFT LCD Module with DLED Backlight, VA	TFT LCD Module with DLED Backlight, VA	TFT LCD Module with DLED Backlight, VA	TFT LCD Module with DLED Backlight, VA
	Display Area (mm)	941.184(H) × 529.416(V) (42.5" diagonal)	1209.60 (H)x680.40 (V) (54.64" diagonal)	1428.48 (H)x803.52(V) (64.5" diagonal)	1650.24(H)x 928.26(V)(75" diagonal)
	Aspect Ratio	16:9	16:9	16:9	16:9
	Native Resolution	3840x2160	3840x2160	3840x2160	3840x2160
	Colors	1.07G (8 Bit + FRC)	1.07G (8 Bit + FRC)	1.07G (8 Bit + FRC)	1.07G (8 Bit + FRC)
	Brightness	520	520	520	520
	Contrast Ratio	4000:1	5000:1	5000:1	5500:1
	Response Time	6.5ms	6.5ms	6.5ms	6.5ms
	Viewing Angles	H = 178, V = 178 (Typ.)	H = 178, V = 178 (Typ.)	H = 178, V = 178 (Typ.)	H = 178, V = 178 (Typ.)
	Backlight Life	50000hrs	50000hrs	50000hrs	50000hrs
	Surface Treatment	Haze 25%, 3H	Haze 25%, 3H	Haze 25%, 3H	Haze 25%, 3H
	Haze	25%	25%	25%	25%
	Bezel (L/R/T/B)	12.8MM/4 Even	12.8MM/4 Even	12.8MM/4 Even	12.8MM/4 Even
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
Platform	Processor	MTK MTK9679, A73*4 /1.4 GHz CPU	MTK MTK9679, A73*4 /1.4 GHz CPU	MTK MTK9679, A73*4 /1.4 GHz CPU	MTK MTK9679, A73*4 /1.4 GHz CPU
	RAM	4GB DDR	4GB DDR	4GB DDR	4GB DDR
	Storage	32 GB eMMC	32 GB eMMC	32 GB eMMC	32 GB eMMC
INPUT	HDMI-IN	Rear*2 (HDMI2.1*2) 4K@60Hz, HDCP2.2 HDMI1support CEC, ARC	Rear*2 (HDMI2.1*2) 4K@60Hz, HDCP2.2 HDMI1support CEC, ARC	Rear*2 (HDMI2.1*2) 4K@60Hz, HDCP2.2 HDMI1support CEC, ARC	Rear*2 (HDMI2.1*2) 4K@60Hz, HDCP2.2 HDMI1support CEC, ARC
	RS232	*1 (2.5mm mini jack)	*1 (2.5mm mini jack)	*1 (2.5mm mini jack)	*1 (2.5mm mini jack)
	IR Pass Thru	*1 (3.5mm mini jack)	*1 (3.5mm mini jack)	*1 (3.5mm mini jack)	*1 (3.5mm mini jack)
OUTPUT	RS232	*1 (2.5mm mini jack)	*1 (2.5mm mini jack)	*1 (2.5mm mini jack)	*1 (2.5mm mini jack)
	IR Pass Thru	*1 (3.5mm mini jack)	*1 (3.5mm mini jack)	*1 (3.5mm mini jack)	*1 (3.5mm mini jack)
LAN	RJ45	x1 (10M/100M)	x1 (10M/100M)	x1 (10M/100M)	x1 (10M/100M)
USB	Type A	USB 2.0 Port (Type A) x 2	USB 2.0 Port (Type A) x 2	USB 2.0 Port (Type A) x 2	USB 2.0 Port (Type A) x 2
	Type C	*1 (DP1.2, PD 15W, USB2.0)	*1 (DP1.2, PD 15W, USB2.0)	*1 (DP1.2, PD 15W, USB2.0)	*1 (DP1.2, PD 15W, USB2.0)
Speaker		10Wx2	10Wx2	10Wx2	10Wx2
COMPATIBILITY	HDMI	3840x2160 @60Hz (YUV444) 3840x2160 @30Hz (YUV420)	3840x2160 @60Hz (YUV444) 3840x2160 @30Hz (YUV420)	3840x2160 @60Hz (YUV444) 3840x2160 @30Hz (YUV420)	3840x2160 @60Hz (YUV444) 3840x2160 @30Hz (YUV420)
Embedded OS	Android Version	Android 14	Android 14	Android 14	Android 14
USB SUPPORTED FILE FORMAT		"Picture - BMP, GIF, JPEG, PNG Video - MPEG 1/2, MPEG-4, H.263, H.264, MJPEG, VP8, VP9, H.265 Audio - AAC, Monkey's Audio, FLAC, PCM, ALAC, MPEG Audio Layer 3, Vorbis, WAV"	"Picture - BMP, GIF, JPEG, PNG Video - MPEG 1/2, MPEG-4, H.263, H.264, MJPEG, VP8, VP9, H.265 Audio - AAC, Monkey's Audio, FLAC, PCM, ALAC, MPEG Audio Layer 3, Vorbis, WAV"	"Picture - BMP, GIF, JPEG, PNG Video - MPEG 1/2, MPEG-4, H.263, H.264, MJPEG, VP8, VP9, H.265 Audio - AAC, Monkey's Audio, FLAC, PCM, ALAC, MPEG Audio Layer 3, Vorbis, WAV"	"Picture - BMP, GIF, JPEG, PNG Video - MPEG 1/2, MPEG-4, H.263, H.264, MJPEG, VP8, VP9, H.265 Audio - AAC, Monkey's Audio, FLAC, PCM, ALAC, MPEG Audio Layer 3, Vorbis, WAV"
Bundle Software					
Smart SoC Embedded		YES	YES	YES	YES
POWER	Voltage	AC 100-240V, 50/60 Hz 2.1A	AC 100-240V, 50/60 Hz 2.7A	AC 100-240V, 50/60 Hz 3.2A	AC 100-240V, 50/60 Hz 4.3A
	Consumption	Normal 98W, Max 160W	Normal 134W, Max 195W	Normal 180W, Max 240W	Normal 218W, Max 280W
ERGONOMICS	Wall Mount (VESA®)	300*300	400*400	500*500	500*500
OPERATING CONDITIONS	Temperature (°C)	0°C to 40°C	0°C to 40°C	0°C to 40°C	TBD
	Humidity	20% ~ 80% RH non-condensing	20% ~ 80% RH non-condensing	20% ~ 80% RH non-condensing	TBD
Support 24/7 (Operating Hours)		YES	YES	YES	YES
DIMENSIONS (W x H x D) DIMENSIONS & WEIGHT	(W x H x D)	971x560x70mm/ 38.23x22.05x2.76 in	1238.4x709.2x70mm/ 48.76x27.92x2.76in	1457.7x832.4x68.8mm/ 57.39x32.77x2.71in	1679x957.1x68.8mm/ 66.1x37.68x2.71in
REGULATIONS		BIS, WPC, CE RED, CB v3, CE-EMC	BIS, WPC, CE RED, CB v3, CE-EMC	BIS, WPC, CE RED, CB v3, CE-EMC	BIS, WPC, CE RED, CB v3, CE-EMC
PACKAGE CONTENTS		1. 2m power cord by ship area, 2. Remote control with battery, 3. Quick Start Guide 4. Wall Mount & Screw (M6 x 18 mm) x 4, 5. Compliance statement	1. 2m power cord by ship area, 2. Remote control with battery, 3. Quick Start Guide 4. Wall Mount & Screw (M6 x 18 mm) x 4, 5. Compliance statement	1. 2m power cord by ship area, 2. Remote control with battery, 3. Quick Start Guide 4. Wall Mount & Screw (M6 x 18 mm) x 4, 5. Compliance statement	1. 2m power cord by ship area, 2. Remote control with battery, 3. Quick Start Guide 4. Wall Mount & Screw (M6 x 18 mm) x 4, 5. Compliance statement

VIEWSONIC ADDRESS

ViewSonic Technologies India Pvt. Ltd.

Unit No. - 816 & 817, 8th Floor, DLF Tower B, Jasola District Centre, New Delhi - 110025

Experience Zone

Unit 18, Ground Floor, DLF - Tower B, Jasola, Delhi - 110025

Assam & Northeast: 9508542635, 9748702050 | **Bihar:** 7677556111, 8283809692, 7277182353| **Chhattisgarh & Vidarbha:** 9373150474
Delhi: 9891554463, 9138381515, 9456818925, 9999704710 | **Gujarat:** 9737623456, 9825951941 | **Haryana:** 9891554463
Karnataka: 9845225041, 9008062617 | **Kerala:** 9790204100 | **Madhya Pradesh:** 9584406611 | **Mumbai:** 8828235506, 8268936909, 7498109410 | **Orissa & Jharkhand:** 9861271171 | **Pune, Goa & Rest of Maharashtra:** 9096565055, 7498109410 | **Punjab, Jammu Kashmir & Himachal Pradesh:** 9888896962 | **Rajasthan:** 9891554463, 9680818726 | **Telangana & Andhra Pradesh:** 8978231796, 7337070922, 8978231796 | **Tamil Nadu:** 9845225041, 8124082812 | **Uttar Pradesh & Uttarakhand:** 8318250959, 9559924020, 8283809692
West Bengal & Sikkim : 9748702050, 9748952308



/ViewSonicIN



/IndiaViewsonic



/ViewSonic



/viewsonicindia



Scan for more information